

Purolator®

Purolator Filtration Systems Housing
HEPA PURO® Seal HSA
Standard Side Access HEPA Filter Housing


Introduction

For Commercial & Industrial applications requiring gasket and fluid seal ULTRA-CELL® filtration – 95%, 99.97% or 99.99% efficiency on .3 micron particulate – the Purolator HSA state-of-the-art crank lock system provides consistent compression and continuous sealing. A broad range of configurations, with and without pre-filter tracks, are available to accommodate most system requirements.

Each housing is constructed with specific features which increase product versatility, integrity, and ease of use.

Construction Features

- Factory assembled of 14-gauge galvanized steel into a one-piece construction.
- For added strength, and also to eliminate air leakage, all seams are intermittently welded and caulked.
- Each housing can withstand up to +3" static pressure. (Contact factory for any additional pressure requirements.)
- Our crank lock mechanism creates a positive seal gasket seal between the filter and housing (see photo at right.) Fluid seal models also available.
- Housings are designed to allow easy access and removal of all pre- and final-filters. Configurations over two filters wide include an option for crank lock activation from the left or right side.
- Outwardly turned flanges are included on all units. Custom flanges are available upon request.

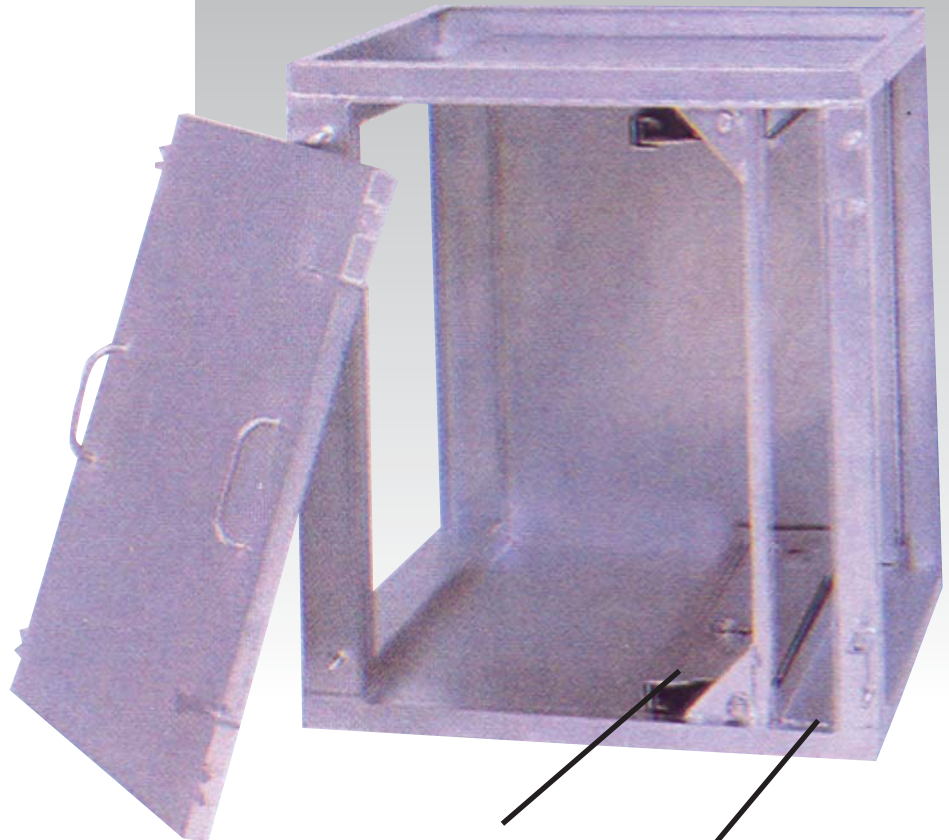

locking tray

pre-filter track

Options

- Weathercap: Refers to a pitched roof of 14-gauge galvanized or stainless steel material; also includes rainguard over the door.
- Fully seam welded housings.
- Double wall insulated construction: Each housing door is insulated with a 1" fiber board between (1) piece of galvanized or stainless steel.
- Epoxy coated housings: Contact factory for pricing and lead time.
- Construction materials: All HSA housings are available in 14-gauge, 304-2B stainless steel. Contact Factory for pricing.
- Custom flanged housings: All housings are available with custom flanges to match air handler specifications. Contact factory for information.

ASHRAE PURO® Seal HSA

Standard Side Access HEPA Filter Housing

Options (Cont.)

- High temperature / pressure units: For high temperature applications, special silicone seals are used to withstand conditions up to 500°F. High pressure vessels with special construction are available – contact factory for information. Standard housing temperature is 250°F.

Housing Options

The following options are available with the PURO Seal HEPA side-access filter housing:

CA	Construction of 14-gauge galvanized steel
CB	Constructed of 14-gauge 304 stainless steel
WC	Weatherproof
DW	Double-wall insulated
LL	Lifting Lugs
DF	Drilled Flanges
DD	Double Door
AL	Left-handed Access
VF	Vertical Flow
SP	Static Pressure Point
SG	Static Pressure Gauge (not installed)
SI	Static Pressure Gauge (installed)
SW	100% Seam Welded

Filter Selection

Purolator crank lock HSA housings will accommodate the following filters:

Pre-filters: Fits 2" and 4" pleated filters, with nominal face size 24" x 24", and 12" x 24".

ULTRA-CELL® filters: Fits filter with actual face size 24" x 24", and 12" x 24". Filters are gasketed on air entering side for fully seam welded housing, and downstream for an intermittently welded housing. Under-sized filters i.e. 23-3/8" x 23-3/8"

can be fitted as well. Contact factory for information.

All HEPA Side Access (HSA) housings can be configured to larger models above 3x3 units. These units are available factory intermittently welded and sealed, or can be assembled during installation at a job site by bolting or welding them together. Filter removal will be from both sides on housings larger than 3x3 units. Housings taller than 4 units high will ship in two pieces.

Housing Flange

Note the dimensions for installation flanges included on units are as follows:

Upstream: Top/Bottom: 2-3/4

Side: 1-3/4

Downstream: Top/Bottom: 1-1/2

Side: 1-3/4

Weatherproofed and custom units use various flange arrangements. Contact factory for more information.

Housings are available in (6") and (12") final filter depths:

- with no pre-filter – 21-1/2" deep
- with a 2" pre-filter – 25" deep
- with a 4" pre-filter – 27" deep

Dimensions

Height	Dimension	Width	Dimension
1	27-1/4	1	24-1/4
2	54-1/2	2	48-1/4
3	81-3/4	3	72-1/4

- All dimensions are outside of flange dimensions and are noted in foot or half-foot increments.
- Dimensions are calculated based on specifications of 24 x 24 filters.
- Contact factory for other size data.

P-PUROSEALHSA-709

Purolator

www.purolatorair.com



CLARCOR Air Filtration Products

100 River Ridge Circle • Jeffersonville, IN 47130

Customer Care Team: 1-866-925-2247 • Fax: 1-800-784-3458

Email: info@purolatorair.com • www.purolatorair.com

Distributed by:

© 2009 CLARCOR Air Filtration Products.
CLARCOR Air Filtration Products has a policy of continuous product research and development and reserves the right to change design and specifications without notice. Terms and Conditions of Sale can be accessed in the "LOGIN" section at www.purolatorair.com