


MODEL NUMBER	NOMINAL SIZE (INCHES) HXWXD	ACTUAL SIZE (INCHES) HXWXD	RATED AIR FLOW (CFM)	INITIAL RESISTANCE (IN. W.G.)	MEDIA AREA (SQUARE FEET)	MERV RATING
DR95-4412	24X24X12	23-3/8X23-3/8X11-1/2	2000	.34	101.5	15
DR95-0412	20X24X12	19-3/8X23-3/8X11-1/2	1650	.34	83.0	15
DR95-0012	20X20X12	19-3/8X19-3/8X11-1/2	1400	.34	67.7	15
DR95-2412	12X24X12	11-3/8X23-3/8X11-1/2	1000	.34	46.1	15
DR65-4412	24X24X12	23-3/8X23-3/8X11-1/2	2000	.26	101.5	11
DR65-0412	20X24X12	19-3/8X23-3/8X11-1/2	1650	.26	83.0	11
DR65-0012	20X20X12	19-3/8X19-3/8X11-1/2	1400	.26	67.7	11
DR65-2412	12X24X12	11-3/8X23-3/8X11-1/2	1000	.26	46.1	11

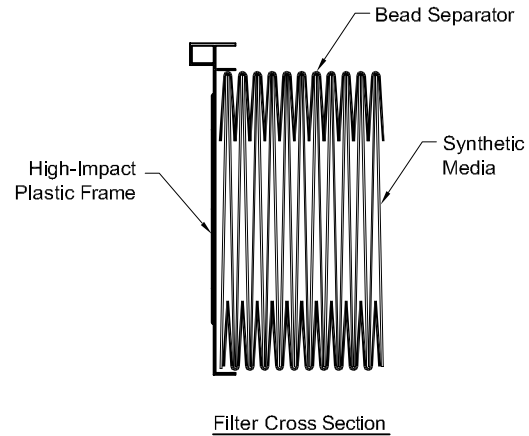

**STANDARD CONSTRUCTION**

1. 100% Synthetic Media
  2. Bead Separator Packs
  3. High-Impact Plastic Frame Panels
  4. Foamed Hot Melt Sealant
  5. Reverse Air Flow Option Available
- See MKT-P-00542

**NOTES**

1. Testing per ASHRAE 52.1-1999
2. Final Resistance: 1.5" W.G.
3. Rated Velocity - 500 FPM
4. Maximum Operating Temperature: 140 deg. F
5. Class 1 Filter per UL Standard 900
6. Special Sizes Not Available.



P.O. Box 32578  
 Louisville, KY 40232  
 P: 866-925-2247  
 F: 502-961-0930  
 www.purolatorair.com

**CONTACT FACTORY TO  
 VERIFY REVISION LEVEL**

**TOLERANCES  
 UNLESS OTHERWISE SPECIFIED**

FRACTIONAL -  
 DECIMAL -  
 ANGLES -

**ALL DIMENSIONS IN INCHES**

DRAWING NAME

**12" DOMINATOR**

APPROVED BY

SPECIFICATION NO.

**MKT-P-00528**

PAGE

**1 OF 1**

SCALE

**NONE**

DWG. SIZE

**C**

REVISION

**NEW**

REVISION DATE

**03-10-08**

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLC AIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.