


Model Number	Nominal Size (Inches) W x H x D	Actual Size (Inches) W x H x D	Rated Air Flow (CFM)	Initial Resistance (IN W.G.)	Media Area (Square Feet)
PAF11-STD2	12 x 24 x 4	11-3/8 x 23-3/8 x 3-3/4	1000	.24	14.4
PAF11-STD2	16 x 20 x 4	14-1/2 x 19-1/2 x 3-3/4	1100	.24	14.9
PAF11-STD2	16 x 25 x 4	15-1/2 x 24-1/2 x 3-3/4	1400	.24	18.6
PAF11-STD2	18 x 24 x 4	17-3/8 x 23-3/8 x 3-3/4	1500	.24	20.4
PAF11-STD2	20 x 20 x 4	19-1/2 x 19-1/2 x 3-3/4	1400	.24	19.1
PAF11-STD2	20 x 24 x 4	19-3/8 x 23-3/8 x 3-3/4	1625	.24	23.0
PAF11-STD2	20 x 25 x 4	19-3/8 x 24-3/8 x 3-3/4	1750	.24	24.0
PAF11-STD2	24 x 24 x 4	23-3/8 x 23-3/8 x 3-3/4	2000	.24	28.0
PAF11-STD2	25 x 29 x 4	24-1/2 x 28-1/2 x 3-3/4	2500	.24	34.6
PAF11-STD2	28 x 30 x 4	27-1/2 x 29-1/2 x 3-3/4	2900	.24	33.6

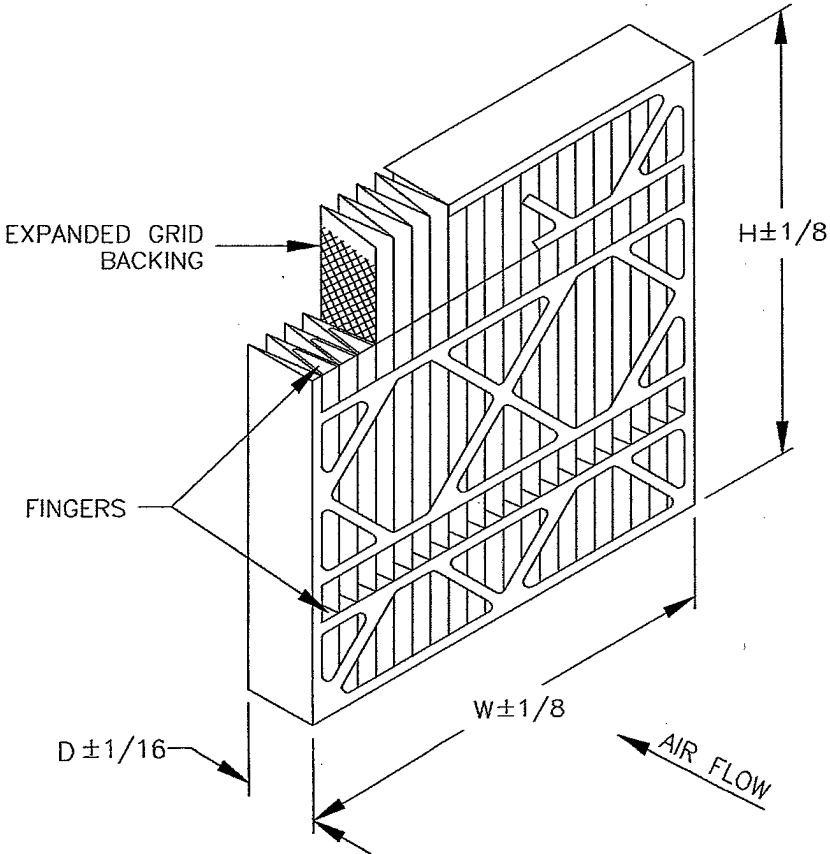


STANDARD CONSTRUCTION

1. Yellow Electrostatic 100% Synthetic Media
2. 10.8 Pleats Per Foot
3. Expanded Metal Pleat Supports
4. Moisture Resistant Beverage Board Frame
5. Double Wall Frame
6. (2) Rows of Fingers on Air Entering Side

NOTES

1. Average Efficiency: 35-40% ASHRAE 52.1-1992
MERV 11 ASHRAE 52.2-1999
2. Final Resistance: 1.0" W.G.
3. Rated Velocity: 500 FPM
4. Class 2 Filter Per U.L. Standard 900
5. Maximum Operating Temperature: 200 deg. F

 <p>P.O. Box 32578 Louisville, KY 40232 P: 866-925-2247 F: 502-961-0930 www.purolatorair.com</p>	<p>TOLERANCES UNLESS OTHERWISE SPECIFIED</p> <p>FRACTIONAL - DECIMAL - ANGLES -</p>	<p>DRAWING NAME PAF11 (4" DEPTH)</p>	
	<p>CONTACT FACTORY TO VERIFY REVISION LEVEL</p>	<p>APPROVED BY <i>H. Q. [Signature]</i></p> <p>SCALE NONE</p>	<p>SPECIFICATION NO. MKT-P-00160</p> <p>DWG. SIZE A</p>
<p>ALL DIMENSIONS IN INCHES</p>		<p>CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLC AIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.</p>	