


Model Number *	Nominal Size (Inches) H x W x D	Actual Size (Inches) H x W x D	Rated Air Flow (CFM)	Initial Resistance (In. W.G.)			Media Area (Square Feet)
				60-65%	80-85%	90-95%	
SL2VS__ - 2412	12 x 24 x 12	11-3/8 x 23-3/8 x 11-1/2	1000	0.25	0.38	0.46	33
SL2VS__ - 0412	20 x 24 x 12	19-3/8 x 23-3/8 x 11-1/2	1650	0.25	0.38	0.46	61
SL2VS__ - 4412	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	2000	0.25	0.38	0.46	75

\* Insert Filter Efficiency Code (65=60-65%, 85=80-85%, 95=90-95%). Example: SL2VS95 - 4412 is 95%, 24x24x12 Nominal Size.

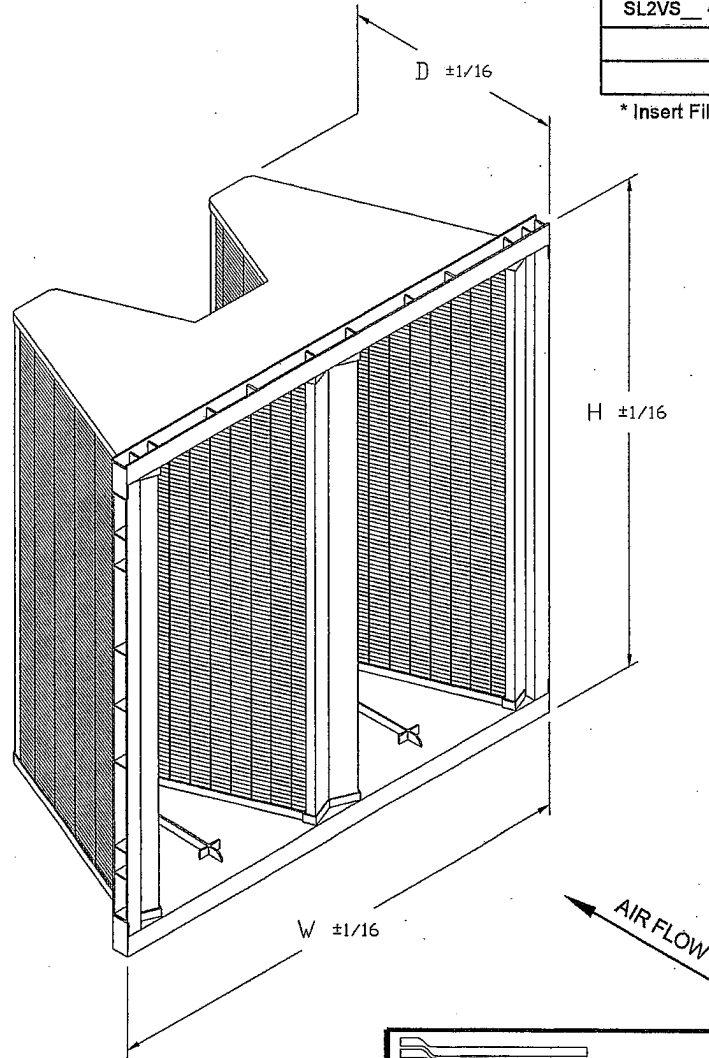


**STANDARD CONSTRUCTION**

- 100% Synthetic Media
- Mini-Pleat Bead Separator Packs
- High-Impact Plastic End Panels
- High-Impact Plastic Strut Supports
- Foamed Hot Melt Sealant in Vertical Struts
- Optional Gasket Available:
  - U - Air Entering Side (Ex: SL2VS95-4412-U)
  - D - Air-Leaving Side
  - UD - Both Sides
- Reverse Air Flow Option Available  
Noted by 'R' in Model Number (Ex: SL2VS95-4412-R)

**NOTES**

- Average Efficiency, MERV
  - 60-65% ASHRAE 52.1-1992, MERV 11 ASHRAE 52.2-1999
  - 80-85% ASHRAE 52.1-1992, MERV 13 ASHRAE 52.2-1999
  - 90-95% ASHRAE 52.1-1992, MERV 14 ASHRAE 52.2-1999
- Final Resistance: 1.5" W.G.
- Rated Velocity - 500 FPM
- Class 1 Filter Per U.L. Standard 900
- Maximum Operating Temperature: 140 deg. F
- Special Sizes Not Available

 <p>HENDERSON, NC PHONE: 1-800-682-6815 FAX: 1-252-492-6557</p>	<b>TOLERANCES</b> UNLESS OTHERWISE SPECIFIED		DRAWING NAME		
	FRACTIONAL DECIMAL ANGLES		<b>SERVA-CELL 2VS (SYNTHETIC MEDIA)</b>		
CONTACT FACTORY TO VERIFY REVISION LEVEL		APPROVED BY <i>ACM</i>		SPECIFICATION NO.	
		SCALE NONE		MKT-P-00518	
ALL DIMENSIONS IN INCHES		DWG. SIZE A		PAGE 1 OF 1	
		REVISION A		REVISION DATE 10-26-06	
CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLC AIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.					