


MODEL NUMBER	NOMINAL SIZE (INCHES) WXHXD	ACTUAL SIZE (INCHES) WXHXD	RATED AIR FLOW (CFM)	INITIAL RESISTANCE (IN. W.G.)	MEDIA AREA (SQUARE FEET)	MERV RATING
DR95B-4412	24X24X12	23-3/8X23-3/8X11-1/2	2000	.28	130	15
DR95B-0412	20X24X12	19-3/8X23-3/8X11-1/2	1650	.28	116	15
DR95B-0012	20X20X12	19-3/8X19-3/8X11-1/2	1400	.28	112	15
DR95B-2412	12X24X12	11-3/8X23-3/8X11-1/2	1000	.28	66.5	15
DR65B-4412	24X24X12	23-3/8X23-3/8X11-1/2	2000	.19	130	11
DR65B-0412	20X24X12	19-3/8X23-3/8X11-1/2	1650	.19	116	11
DR65B-0012	20X20X12	19-3/8X19-3/8X11-1/2	1400	.19	112	11
DR65B-2412	12X24X12	11-3/8X23-3/8X11-1/2	1000	.19	66.5	11

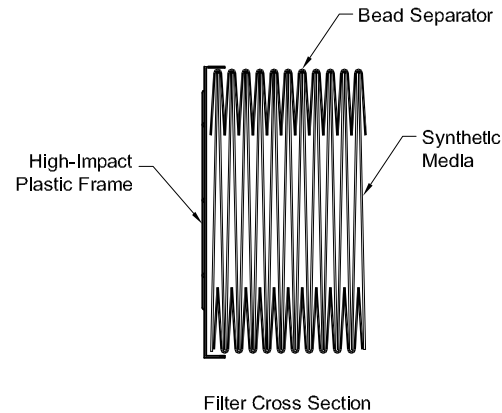

**STANDARD CONSTRUCTION**

- 100% Synthetic Media
- E-Pleat Technology Pleat Pack  
Embossed Media with Adhesive Bead Separators
- High-Impact Poly Styrene Plastic Frame Panels
- Foamed Hot Melt Sealant
- (4) Spring Latch Retainer Slots Air Entering Side
- Gasket Optional

**NOTES**

- Testing per ASHRAE 52.2-1999
- Final Resistance: 1.5" W.G.
- Rated Velocity - 500 FPM
- Maximum Operating Temperature: 140 deg. F
- Class 1 Filter per UL Standard 900
- Special Sizes Not Available .



100 River Ridge Circle  
Jeffersonville, IN 47130  
P: 866-925-2247  
F: 502-961-0930  
www.purolatorair.com

CONTACT FACTORY TO  
VERIFY REVISION LEVEL

**TOLERANCES  
UNLESS OTHERWISE SPECIFIED**

FRACTIONAL	-
DECIMAL	-
ANGLES	-

ALL DIMENSIONS IN INCHES

DRAWING NAME <b>DOMINATOR 12" PLASTIC BOX</b>			
APPROVED BY <i>K. Quinn</i>	SPECIFICATION NO. MKT-P-00600	PAGE 1 OF 1	
SCALE NONE	DWG. SIZE A	REVISION A	REVISION DATE 11-15-2010

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLC AIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.