

# Serva-Cell GT

## Technical Data Sheet

Model Number	Nominal Size (Inches) (HxWxD)	Actual Size (Inches) (HxWxD)	Rated Air Flow Capacity (CFM)	Initial Resistance (In. W.G.) @ Rated Air Flow		Recommended Final Resistance (In. W.G.)	Gross Media Area (FT <sup>2</sup> )
				90 - 95% F-8 MERV 14	60 - 65% F-6 MERV 11		
<b>GT-XL Series - Double Header Construction</b>							
SL*GTD-XL	24x24x12	23-3/8 x 23-3/8 x 11-1/2 (594mm x 594mm x 292mm)	2500 (4250 m <sup>3</sup> /hr)	.95" (236 Pa)	.72" (179 Pa)	2.5" (622 Pa)	152
SL*GTD-XL	24x12x12	23-3/8 x 11-3/8 x 11-1/2 (594mm x 289mm x 292mm)	1250 (2125 m <sup>3</sup> /hr)	.95"	.72"	2.5"	76
SL*GTD-XL	24x24x6	23-3/8 x 23-3/8 x 5-7/8	1250	.95"	.72"	2.5"	70
SL*GTD-XL	24x12x6	23-3/8 x 11-3/8 x 5-7/8	635	.95"	.72"	2.5"	53
<b>GT-XL Series - Single Header Construction</b>							
SL*GT-XL	24x24x12	23-3/8 x 23-3/8 x 11-1/2	2500	.95"	.72"	2.5"	152
SL*GT-XL	24x12x12	23-3/8 x 11-3/8 x 11-1/2	1250	.95"	.72"	2.5"	76
<b>GT Series - Double Header Construction</b>							
SL*GTD	24x24x12	23-3/8 x 23-3/8 x 11-1/2 (594mm x 594mm x 292mm)	2500 (4250 m <sup>3</sup> /hr)	.95" (236 Pa)	.72" (179 Pa)	2.5" (622 Pa)	114
SL*GTD	24x12x12	23-3/8 x 11-3/8 x 11-1/2 (594mm x 289mm x 292mm)	1250 (2125 m <sup>3</sup> /hr)	.95"	.72"	2.5"	57
SL*GTD	24x24x6	23-3/8 x 23-3/8 x 5-7/8	1250	.95"	.72"	2.5"	53
SL*GTD	24x12x6	23-3/8 x 11-3/8 x 5-7/8	635	.95"	.72"	2.5"	26
<b>GT Series - Single Header Construction</b>							
SL*GT	24x24x12	23-3/8 x 23-3/8 x 11-1/2	2500	.95"	.72"	2.5"	114
SL*GT	24x12x12	23-3/8 x 11-3/8 x 11-1/2	1250	.95"	.72"	2.5"	57




\* Insert efficiency designator; 9 = 90-95%; 6 = 60-65%

Burst Strength - 25" W.G. (6220 Pa)

Underwriters Laboratories, Inc. Classification  
U.L. Class 1 per U.L. Standard 900

All performance data is based on the ASHRAE 52.2-2007 test method.

Continuous Operating Temperature Limits  
350°F (177°C)

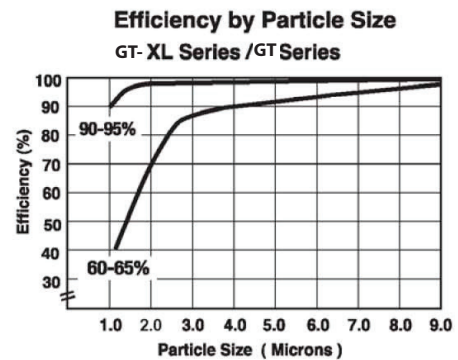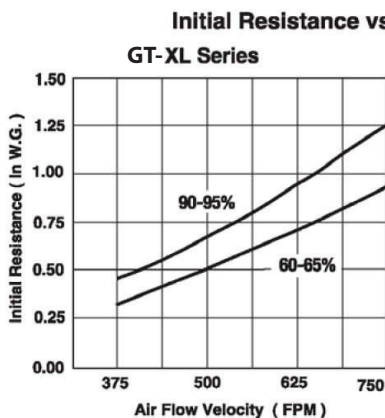

P-SERVAGT-310



[www.purolatorair.com](http://www.purolatorair.com)



**CLARCOR Air Filtration Products**  
100 River Ridge Circle • Jeffersonville, IN 47130  
Customer Care Team: 1-866-925-2247 • Fax: 1-800-784-3458  
Email: [info@purolatorair.com](mailto:info@purolatorair.com) • [www.purolatorair.com](http://www.purolatorair.com)



Distributed by:

© 2010 CLARCOR Air Filtration Products.  
CLARCOR Air Filtration Products has a policy of continuous product research and development and reserves the right to change design and specifications without notice. Terms and Conditions of Sale can be accessed in the "LOGIN" section at [www.purolatorair.com](http://www.purolatorair.com)